LEDTEC

LSB 40W IP20 BATTEN

TECHNICAL DATA SHEET

IP20 Indoor batten light with high efficacy output, featuring power and CCT selection for flexible performance. Sleek, screw-free design with flip-open construction between light module and bracket allows for quick installation across commercial applications.

Lighting Council Australia ACCREDITED

ies Corporate Member 2025/2026

100% AUSTRALIAN OWNED & OPERATED

Areas for Application

- Workshop
- Office
- Garage
- Storage Facilities
- Education Facilities

8/94 Forsyth Street O'Connor WA, 6163
+61 (08) 6371 1780
sales@ledtec.com.au
www.ledtec.com.au

TECHNICAL SPECIFICATIONS

Product	
Model Code - Standard	*LSB-1200-40W-3CCT*

Luminaire Information	
Rated Power	*40W @ Max* *(20W / 25W / 35W)*
Operating Temperature Range	*-25° ~ +45°C*
Accessories	*Sensor Optional*
Dimmable	*Non Dimmable*

Electrical Characteristics	
Power Factor	*0.9*
Input Voltage	*220 - 240VAC*
Driver Type	*Flicker Free Built in Driver*
Power Efficiency	*85%*

Warranty	
Warranty	*5 Years*

Material & Finish	
IP Rating	*IP20*
IK Rating	*IK06*
Material Compostion (Optics)	*Polycarbonate*
Material Composition (Housing)	*Metal*
Product Finishing	*White RAL9016*

Weight & Packaging	
Dimensions	*1200 x 64 x 65mm*

Optical Characteristics	
Correlated Colour Temperature	*3CCT: 3000K / 4000K / 5700K*
Colour Rendering Index	*Ra 80 +*
SDCM	*3*
LED Type	*SMD 2835*
LED Expected Lifespan L80B10	*50,000 hrs*
Luminous Flux	*20W: 2900 - 3200lm* *25W: 3550 - 3850lm* *35W: 4950 - 5250lm* *40W: 5600 - 6000lm*
Beam Angle	*120°*

© Ledtec Pty Ltd -March 2026

COLOUR TEMPERATURES

WARM WHITE
2700K - 3000K

COOL WHITE
5900K - 6500K

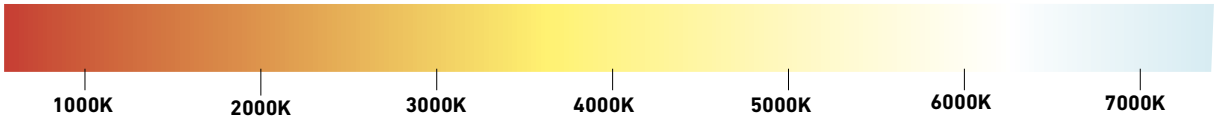

DIMENSIONS

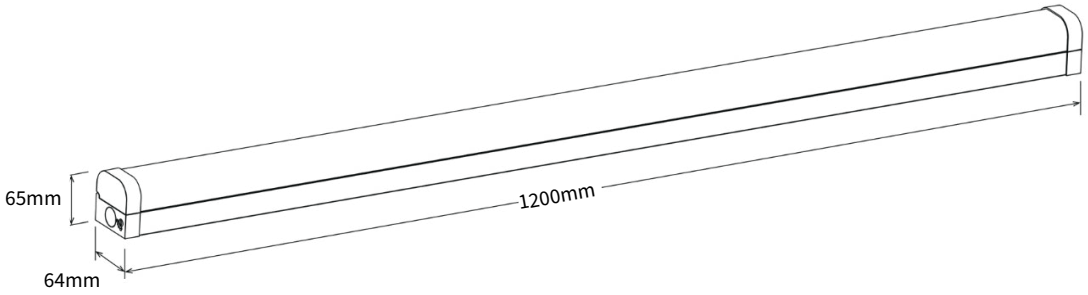

© Ledtec Pty Ltd - March 2026