



LEDTEC

200W LSF2 Floodlight

TECHNICAL DATA SHEET

The LSF2 is a multi-wattage floodlight with dual beam angle selection for flexible light distribution. Featuring integrated photocell and loop in/loop out wiring for simplified installation. Designed to deliver efficient, reliable performance across a wide range of commercial applications.

Areas for Application

- Commercial Areas
 - Parking Lots
- Factories & Warehouses
 - Sports Halls
 - Workshops
- General Area Lighting



8/94 Forsyth Street O'Connor WA, 6163
+61 (08) 6371 1780
sales@ledtec.com.au
www.ledtec.com.au

TECHNICAL SPECIFICATIONS

Product

Model	LSF2-200W
-------	-----------

Luminaire Information

Rated Power	200W / 150W / 100W
Operating Temperature Range	-30°C ~ +50 °C
Fixture Installation	Bracket Mounting Pole Mounting
Dimmable	Non-Dimmable
Accessories	Pole adaptors

Electrical Characteristics

Operating Voltage Range	220-240VAC
Frequency Range	50-60Hz
Power Factor	>0.95
Surge Protection	10KV line - line 10KV line - earth
Driver	Lifud
Driver type	Constant Current
Control	Photocell

Warranty

Warranty	5 years
----------	---------

Material & Finish

Ingress Protection Rating	IP66
Impact Rating	IK08
Material Composition (Body)	Aluminium alloy
Material Composition (Bracket)	Stainless Steel
Material Composition (Lens)	Polycarbonate optical lens
Fixture Colour	Grey (RAL870-3)
Finish	Powder Coating
Category of Corrosion	C4

Weight & Packaging

Product Dimensions	474 x 410 x 61mm
Product Weight	5.5kg
Packaging Dimensions	500 x 440 x 95mm
Packaged Weight	6.5kg


Optical Characteristics

Correlated Colour Temperature	4000K
Colour Rendering Index	80Ra Standard
LED Type	SMD 2835
LED Expected Lifespan	87,500hrs at L80B50
Light Efficacy	150lm/w
Luminous Flux	100W: 13,500 - 14,150lm 150W: 20,250 - 21,225lm 200W: 27,000 - 28,300lm
Beam Angle	Symmetric: 60° - Default Asymmetric: 50°

COLOUR TEMPERATURES


WARM WHITE
2700K - 3000K

COOL WHITE
5900K - 6500K

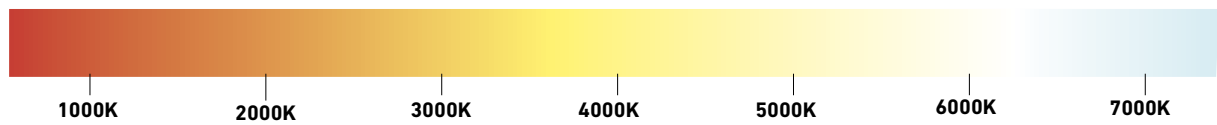


ILLUMINANCE AT DISTANCE

SYMMETRIC 60° - DEFAULT

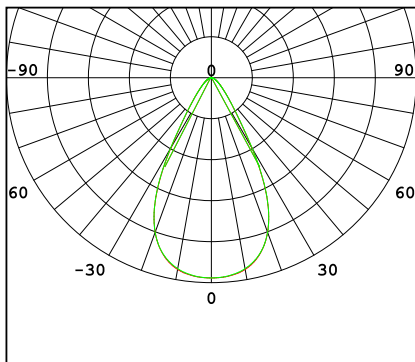

ASYMMETRIC 50°

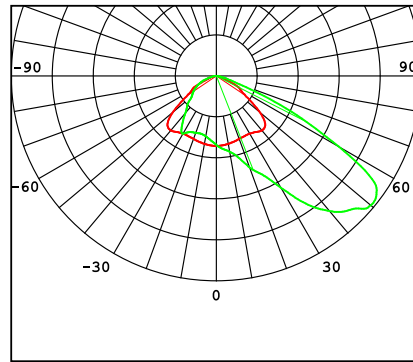

DIMENSIONS

